

CAMPLIGHT[®]



CAMPLIGHT® M99

NSN: 6230-22-126-1080

Mobile lighting for tents and barracks

Mobil belysning til telte og barakker.



- More light – less power
- Quick and easy connection of lamps
- All wiring under the ceiling – no cables on the floor.

- Mere lys – mindre strøm
- Hurtig og enkel tilslutning af lamperne
- Al installation foregår under loftet – ingen ledninger på gulvet

- Simple and tidy installation
- Unique lamp-suspension with fastening of the cable
- Supply for other electrical equipment

- Hurtig og enkel at installere
- Unikt lampeophæng med fastgørelse af ledning
- Mulighed for tilslutning af andet el-udstyr





Simple logistics

Lamps and accessories supplied in a plywoodbox for

- Easy handling
- Easy transport
- Easy stocking

Enkel logistik


Lamperne og tilbehør leveres i krydsfinerbox

- Enkel håndtering
- Enkel transport
- Enkel lagring


CAMPLIGHT M99 NSN: 6230-22-126-1080 • Set consisting of:

CAMPLIGHT M99 NSN: 6230-22-126-1080 • Sæt bestående af:

Transportationbox with insert, 80x55x41 cm • Transportkasse med indsats, 80x55x41 cm	1
Cable drum, 33 m • Kabeltromle, 33 m	1
Extension flex, 5 m • Forlængerledning, 5 m	2
Interconnecting cables, 2.5 m • Mellemkabler à 2.5 m	3
Distributionbox • Fordelerbox	1
Lamps, 220 V / 18 W • Lamper, 220 V / 18 W	5
Filter, red / yellow • Filtre, rød / gul	5
Fluorescent lamp • Lysrør	1

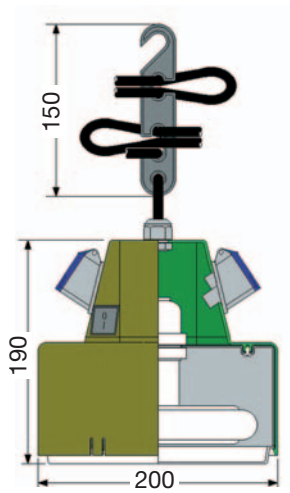

Luminous intensity
Lysudbytte ??

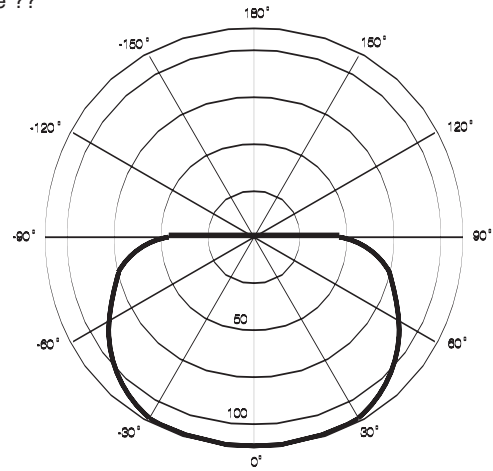

Technical Specification for 1 lamp

Connection:	CEE plug 3p/6h with 3m x 1,5 mm rubber cable
Sockets:	Standard: 2 pcs. CEE sockets 3p/6h Option: 3 or 4 pcs. CEE sockets 3p/6h
Insulation category:	IP64
Weight:	1,6 kg.
Light source:	18W circular electronically controlled fluorescent tube
Voltage:	110V 60 Hz and 220-235V 50/60 Hz
Electricity consumption:	0,08 A
Light output:	1000 Lm

Tekniske specifikationer for 1 lampe

Tilslutning:	CEE stik 3p/6h med 3m x 1,5 mm gummikabel
Forgreningsstikdåser:	Standard: 2 stk. CEE stikdåser 3p/6h Mulighed for: 3 eller 4 stk. CEE stikdåser 3p/6h
Isolationsklasse:	IP64
Vægt:	1,6 kg
Lyskilde:	18W lysstofrør med elektronisk drossel
Forsyningsspænding:	220-235V 50/60 Hz
Strømforbrug:	0,08 A
Lysudbytte:	1000 Lm



Thy EI-Teknik ApS

Tel. +45 96177300 • Fax +45 96177301 • E-mail: thyel@thyel.dk • www.thyel.dk